




## BEARING Driveshaft do Brasil

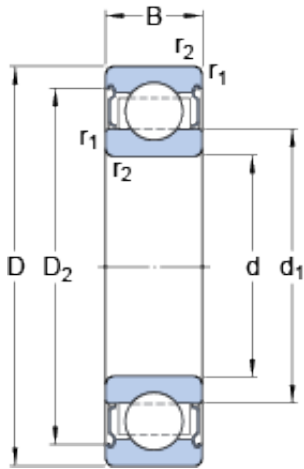

40 mm x 90 mm x 23 mm 92-321155/1-06235  
Slewing Bearing With Internal Gear  
1012/1300/90mm

Bearing No. 6308-2Z/VA208

6308-2Z/VA208 Bearing 2D drawings and 3D CAD models

Size	90x40x23 mm
Bore Diameter	90 mm
Outer Diameter	40 mm
Width	23 mm
d	40 mm
D	90 mm
B	23 mm
d <sub>1</sub>	56.11 mm
D <sub>2</sub>	77.7 mm
r <sub>1,2</sub> - min.	1.5 mm
d <sub>a</sub> - min.	49 mm
d <sub>a</sub> - max.	56 mm
D <sub>a</sub> - max.	81 mm
r <sub>a</sub> - max.	1.5 mm
Basic dynamic load rating - C	42.3 kN
Basic static load rating - C <sub>0</sub>	24 kN
Limiting speed	60 r/min
Limiting temperature - T	350 ° C
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0



## BEARING Driveshaft do Brasil

EAN	7316570701746
Product Group	B00308
Enclosure	2 Metal Shields
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	Segmented Cage
Cage Material	Graphite
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	40MM Bore; 90MM Outside Diameter; 23MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; Segmented Cage Internal Special Features; C0-Medium Internal Cle
Other Features	Deep Groove   Extreme Temperature Variant
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Weight / LBS	1.411
Outside Diameter	3.543 Inch   90 Millimeter
Inner Race Width	0 Inch   0 Millimeter
Bore	1.575 Inch   40 Millimeter
Outer Race Width	0.906 Inch   23 Millimeter
d <sub>1</sub>	56.11 mm



## BEARING Driveshaft do Brasil

$D_2$	77.7 mm
$r_{1,2}$ min.	1.5 mm
$d_a$ min.	49 mm
$d_a$ max.	56 mm
$D_a$ max.	81 mm
$r_a$ max.	1.5 mm
Basic dynamic load rating C	42.3 kN
Basic static load rating $C_0$	24 kN
Limiting temperature T max.	350 ° C
Mass bearing	0.65 kg