




BEARING Driveshaft do Brasil

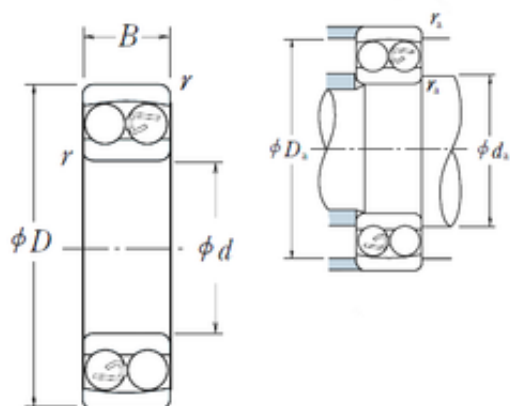

40 mm x 90 mm x 23 mm 200DBS262y Slewing Bearing With External Gear Teeth 200x380x58mm

Bearing No. 1308

1308 Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|-------------|
| Size | 40x90x23 mm |
| Bore Diameter | 40 mm |
| Outer Diameter | 90 mm |
| Width | 23 mm |
| d | 40 mm |
| D | 90 mm |
| B | 23 mm |
| C | 23 mm |
| r min. | 1,5 mm |
| da min. | 48 mm |
| Da max. | 82 mm |
| ra max. | 1,5 mm |
| Weight | 0,715 Kg |
| Basic dynamic load rating (C) | 29,8 kN |
| Basic static load rating (C0) | 9,7 kN |
| (Grease) Lubrication Speed | 6 700 r/min |
| (Oil) Lubrication Speed | 8 500 r/min |
| Calculation factor (e) | 0,24 |
| Calculation factor (Y0) | 2,7 |
| Calculation factor (Y2) | 4 |
| SRI | 5.83 |
| Y3 | 2.6 |
| hidYobi | 1308 |
| LangID | 1 |
| PCD | 65.5 |



BEARING Driveshaft do Brasil

| | |
|--------------|------------|
| D_ | 90 |
| Y2 | 4 |
| SREX | 0 |
| cyl count | 15 |
| B_ | 23 |
| hidTable | ecat_NSSAB |
| Oil rpm | 8500 |
| SRE | 0 |
| Y0 | 2.7 |
| mass | 0.715 |
| ra | 1.5 |
| GRS rpm | 6700 |
| SRIX | 0.05 |
| groove inner | 54.38 |
| D_a | 82 |
| SRIN | 0 |
| C0 | 9.7 |
| groove outer | 77.464 |
| SREN | 0 |
| X0 | 1 |
| Prod_Type3 | SABB_SA_CB |
| X1 | 1 |
| da | 48 |
| X2 | 0.65 |
| e | 0.24 |
| yobi | 1308 |
| r | 1.5 |
| KBRG | 1352 |
| CAng | 9.193 |
| cyl dia | 11.112 |