




BEARING Driveshaft do Brasil

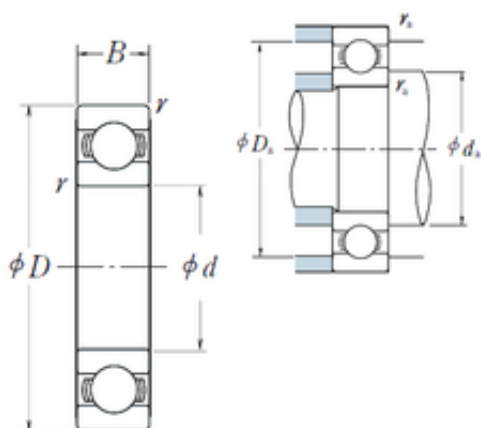

70 mm x 110 mm x 20 mm 32907 Bearing
35x55x14mm

Bearing No. 6014

6014 Bearing 2D drawings and 3D CAD models

Size	70x110x20 mm
Bore Diameter	70 mm
Outer Diameter	110 mm
Width	20 mm
d	70 mm
D	110 mm
B	20 mm
C	20 mm
r min.	1,1 mm
da min.	76,5 mm
da max	80,5 mm
Da max.	103,5 mm
ra max.	1 mm
Weight	0,608 Kg
Basic dynamic load rating (C)	38 kN
Basic static load rating (C0)	31 kN
(Grease) Lubrication Speed	6 000 r/min
(Oil) Lubrication Speed	7 100 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NSK
Minimum Buy Quantity	N/A
Weight / Kilogram	0.62
EAN	0029176034350
Product Group	B00308



BEARING Driveshaft do Brasil

Enclosure	Open
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	70MM Bore; 110MM Outside Diameter; 20MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.nskamericas.com
Manufacturer Item Number	6014
Weight / LBS	0.604
Bore	2.756 Inch 70 Millimeter
Outside Diameter	4.331 Inch 110 Millimeter
Outer Race Width	0.787 Inch 20 Millimeter
SRI	6.16
hidYobi	6014
LangID	1
D_	110
SREX	0.025
B_	20



BEARING Driveshaft do Brasil

da min	76.5
hidTable	ecat_NSRDGB
Oil rpm	7100
SRE	6.16
mass	0.608
GRS rpm	6000
ra	1
SRIX	0.025
D_a	103.5
SRIN	-0.025
C0	31
fo	15.6
SREN	-0.025
DE_	101.906
Prod_Type3	DGBB_SR_OT
DA_	11.906
bomp	0
Z_	14
yobi	6014
C_conv	38000
ALPHA_	0
SDM_	90
r	1.1
KBRG	6101
SBRG	10
DI_	78.094